


Polycarbonate Dome Aluminium Upstand SDP/AOV

Thermally Broken Dome top Smoke Vent with roof access and comfort ventilation

25mm Thermal Break Dome & Solid Top Lid Smoke Vent

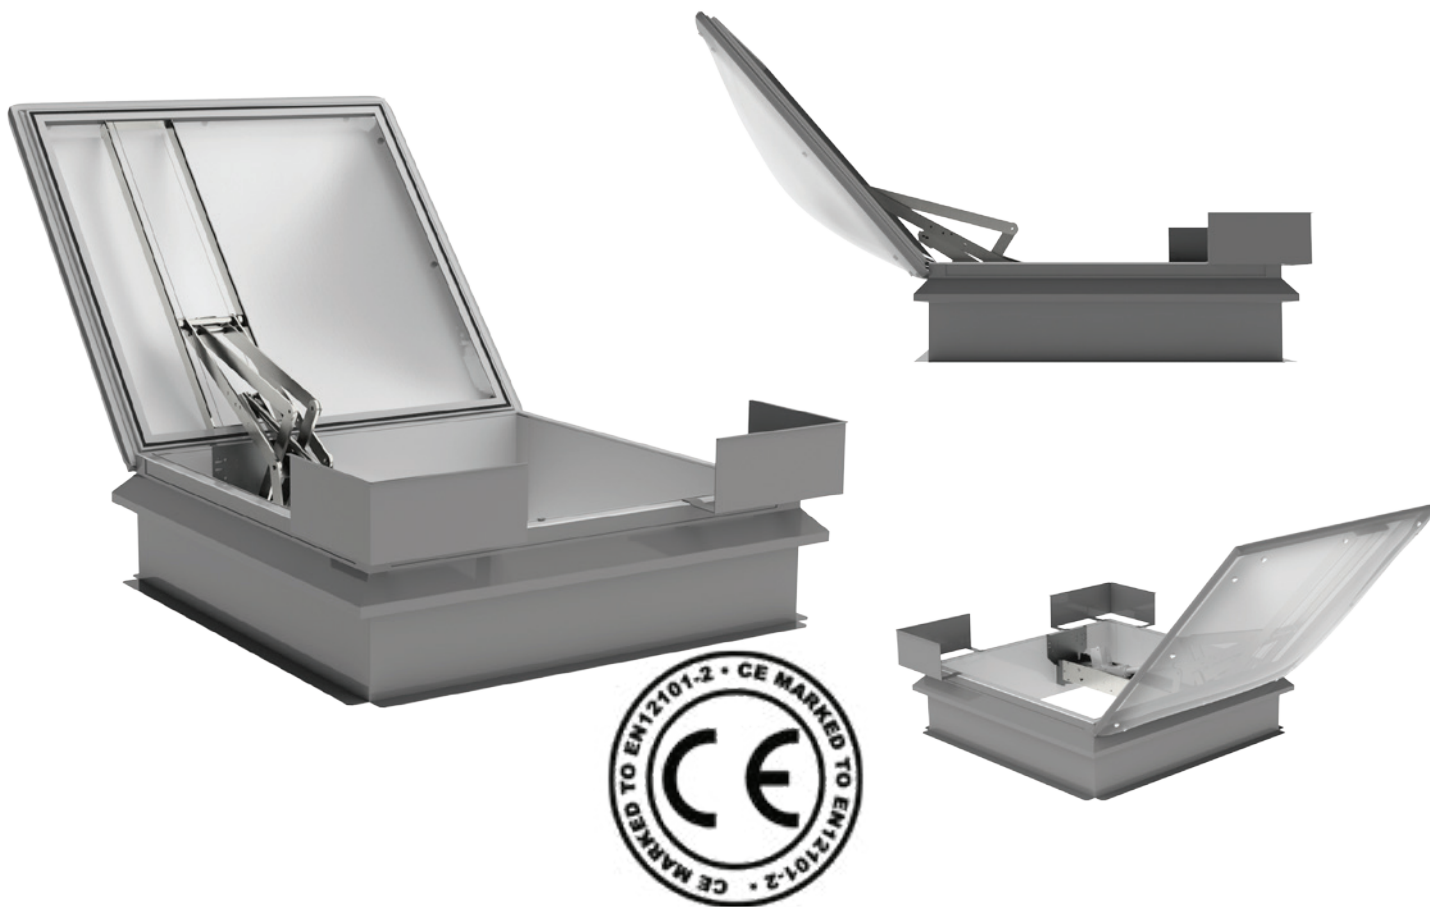

EN12101-2 Performance*

Reliability 1,000 + 10,000 Comfort Ventilation

Snow Load SL500

Low Ambient Temp T (-15°)

Wind Load WL1500

Resistance to heat B300

Stock Sizes

SDP/AOV

1050 x 1050, 1260 x 1260, 1050 x 1550.

* SDP/AOV Only, other models may differ.

Insulation Options

25mm 0.43 W/m²K Polyisocyanurate Insulation

25mm 0.63 W/ m²K Non-combustible Mineral Wool

