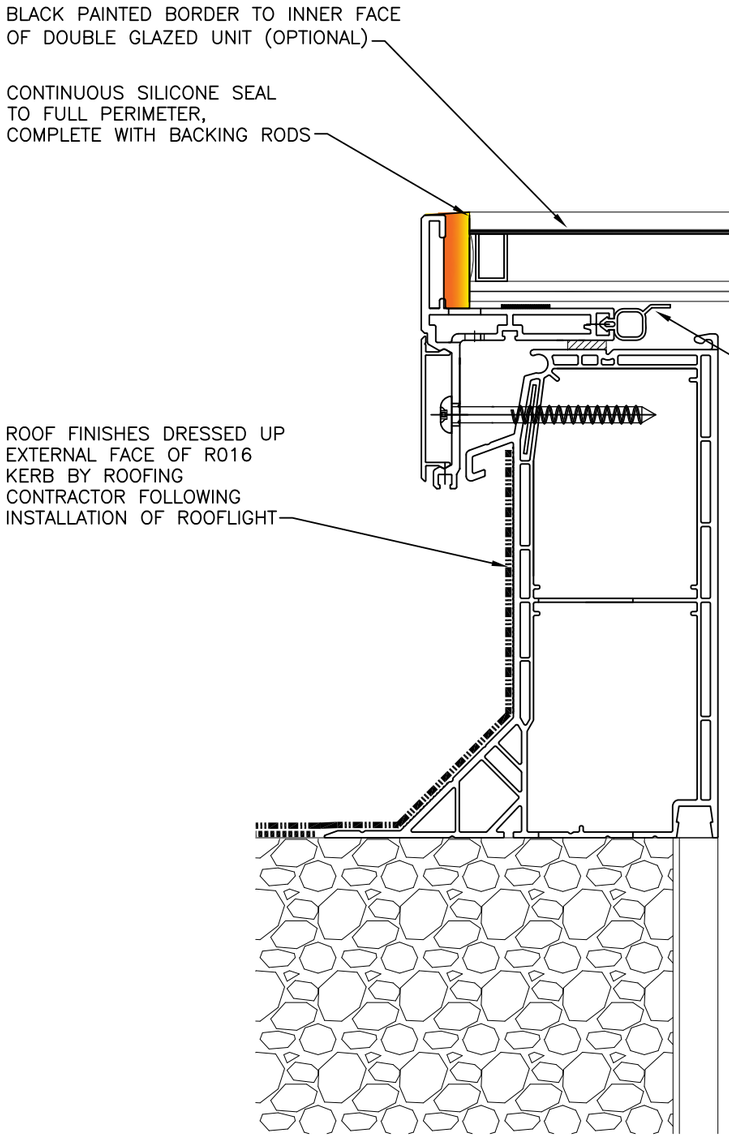

RO16 Upstand Roof opening size
600 x 600
750 x 750
750 x 1050
850 x 850
850 x 1350
850 x 1650
850 x 1850
1050 x 1050
1350 x 1350

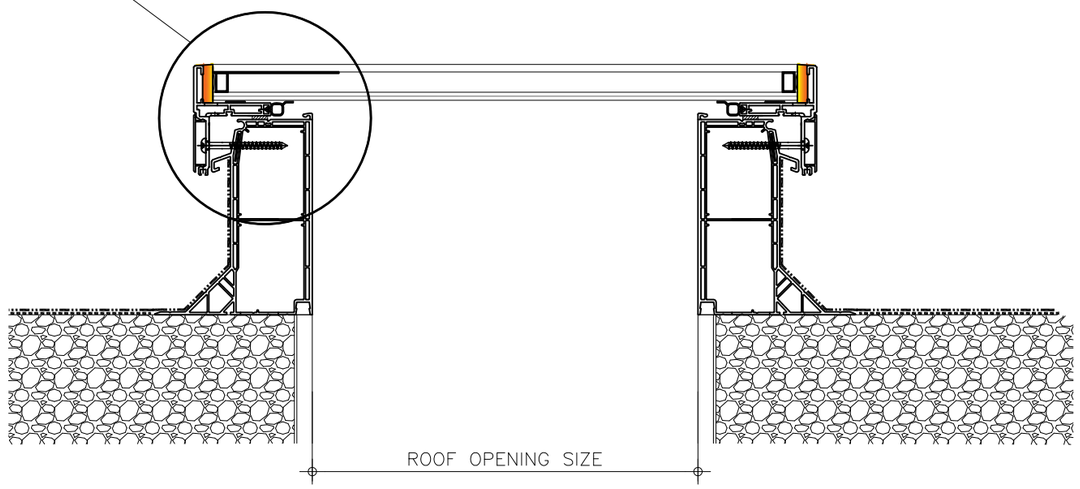

Paint Specification:
Polyester Powder coated to:
Colour: To be confirmed
RAL: To be confirmed

Typical Glazing Specification:
Outer - 6mm thick clear toughened low 'E' glass
Core - 14mm thick air filled cavity
Inner - 6.4mm thick clear laminated glass

REV:	DATE:	DESCRIPTION:	DRN BY
0	10.10.19	First issue of drawing	IMW

DESCRIPTION:
Unventilated single-pane flat glass rooflight (FLAT GLASS), fixed to RO16 roof kerb

DRAWN BY:	CREATION DATE:	CHECKED BY:	SCALE(S)	REVISION:
IMW	10.10.19	--	1:5, 1:2 @ A3	0

Coxdome
Unit 1, Prothero Industrial Estate, Bilport Lane, Wednesbury, West Midlands, WS10 0NT
Tel: 0121 530 4230 Web: www.coxdome.co.uk

COXDOME®

DRG No.
CD-RO16-00-IGLF-SS