

Typical Glazing Specification:
 Outer - 3mm thick clear UV protected polycarbonate
 Mid - 2mm thick clear polycarbonate
 Inner - 2mm thick clear or diffused polycarbonate (T.B.C.)


| CIRCULAR SF15 ROOFLIGHT SPECIFICATION (FABRICATED FROM SELF FINISH WHITE EXTRUDED uPVC) | |
|--|-----|
| Quantity of Rooflight(s) | 1no |
| Roof Opening - Diameter (mm) | Ø |
| Kerb Ventilation? | x |
| Opening Frame? | x |

TAMPER RESISTANT FIXINGS,
COMPLETE WITH COVER CAP

uPVC WEATHER FLANGE; APPLY
WEATHER PROOFING MEMBRANE TO
KERB DRESS BEHIND WEATHER FLANGE
TAMPER RESISTANT FIXINGS,
COMPLETE WITH COVER CAP

KERB SECURED USING SUITABLE
FIXINGS APPROPRIATE TO THE
SUBSTRATE (SUPPLIED BY INSTALLER)

ROOF FINISHES DRESSED UP
EXTERNAL FACE OF KERB
BY ROOFING CONTRACTOR

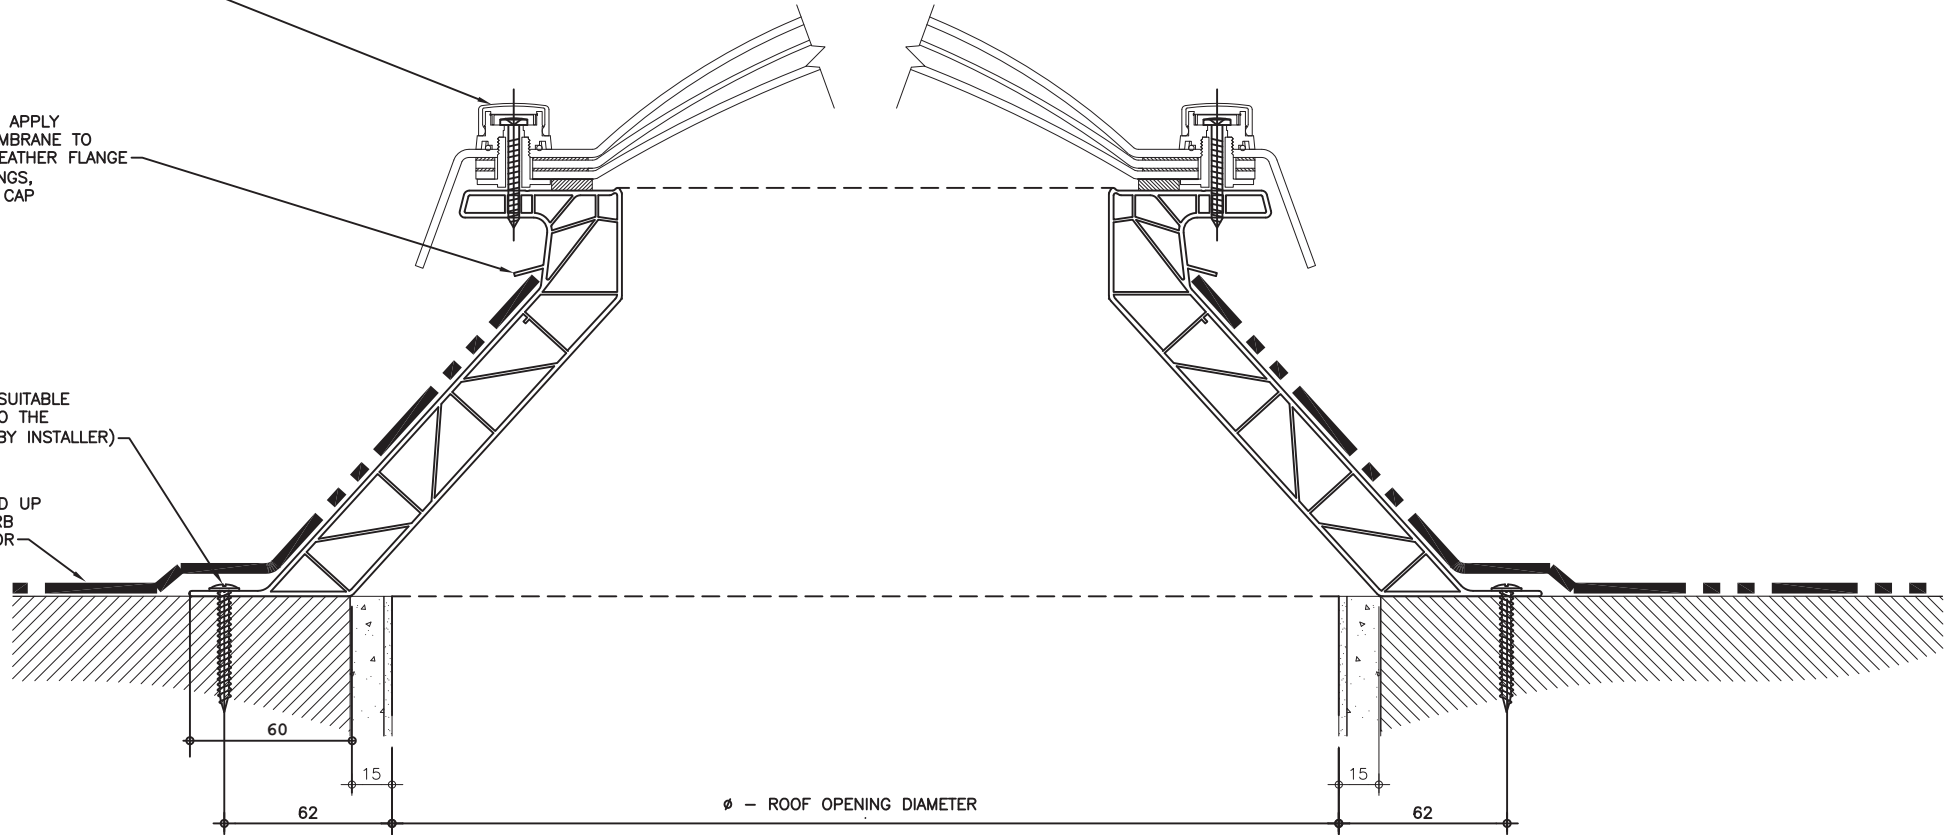

SECTION THROUGH ROOFLIGHT

DRAWING MADE BY CAD
MANUAL CHANGES PROHIBITED

WELDING
ASSEMBLY
POWDER COAT

Copyright is claimed in this drawing and no copy may be made without prior written permission.



The article shown is also the subject of:
 patent rights
 registered design rights
 unregistered rights
 this drawing is a design document
 patent pending

WIND RESTRAINTS SHOULD BE SPECIFIED ON ALL ACCESS HATCHES SUBJECT TO HIGH WIND CONDITIONS IF MANUALLY OPERATED ACCESS HATCH/COVER IT IS ESSENTIAL THAT SAFE MEANS OF ACCESS IS PROVIDED FOR THE OPERATOR



| | | | | |
|---|------------|--------|---------|---------------|
| Designed by SURESPAN | Checked by | Client | Project | Date |
| EXISTING LAW PROTECTS SURESPAN'S RIGHT OF POSSESSION TO THIS DRAWING. THE DESIGN OR THE DRAWING MUST NOT, WITHOUT PERMISSION OF THE COMPANY, BE PUBLISHED, COPIED, REPRODUCED MANUFACTURED OR EXPLOITED IN ANY OTHER UNAUTHORIZED WAY | | | QTY | Revision A |
| | | | | Sheet / 23 |