ADDLITE

www.addlite.co.uk

Coxdome Galaxy Replacement Dome

The 'dome-only' solution for the refurbishment and replacement of rooflights fitted to existing kerbs and upstands.

MATERIAL

- Manufactured using 3mm polycarbonate
- Double or triple polycarbonate layers
- 100mm Fixing Flange

PERFORMANCE

- Class B Non-Fragile, ACR(M)001:2005 Soft Body Tested
- TP(a) Classification (only achievable with minimum 3mm polycarbonate)
- B-s1-d0 Fire Classification according to BS EN15301:1 2007

Available Sizes

External Dome Size	Min ext kerb	Max ext kerb
600 x 600	510 x 510	610 x 610
600 x 900	510 x 810	610 x 910
600 x 1200	510 x 1120	610 x 1220
600 x 1800	510 x 1730	610 x 1830
750x 750	660 x 660	760 x 760
750 x 900	660 x 810	760 x 910
900 x 900	810 x 810	910 x 910
900 x 1200	810 x 1120	910 x 1220
900 x 1800	810 x 1730	910 x 1830
1050 x 1050	970 x 970	1070 x 1070
1050 x 1500	970 x 1420	1070 x 1520
1200 x 1200	1120 x 1120	1220 x 1220
1200 x 1800	1120 x 1730	1220 x 1830
1200 x 2400	1120 x 2340	1220 x 2440
1500 x 1500	1420 x 1420	1520 x 1520
1800 x 1800	1730 x 1730	1830 x 1830

CAD Drawings

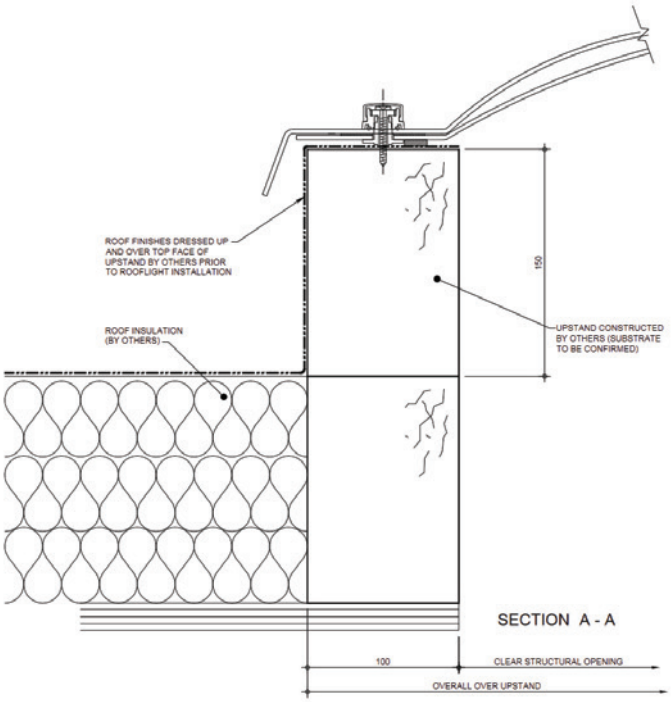

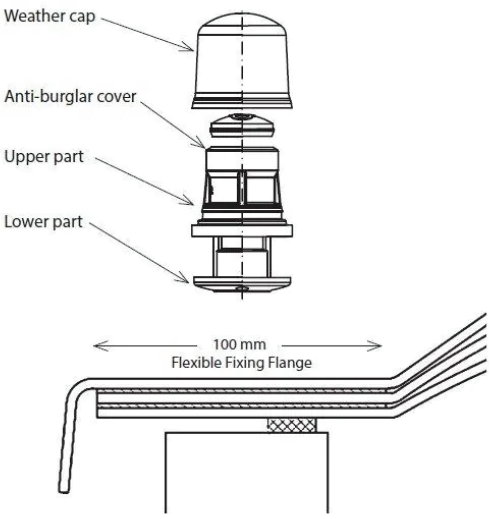

Minimum 50mm builders kerb required, ideally 100m maximum

Please Note:
The glazing tape between the polycarbonate layers is 100mm and therefore can be visible on builder's kerbs less than 100mm width.

sales@addlite.co.uk
Leamore Close, Leamore Enterprise Park Walsall, WS2 7NL
01922 711185

© 2016 Surespan Ltd. All rights reserved.